


642-998 - DCUCD Designing Cisco Data Center Unified Computing (DCUCD) v5.0

<https://www.certleader.com/642-998-dumps.html>

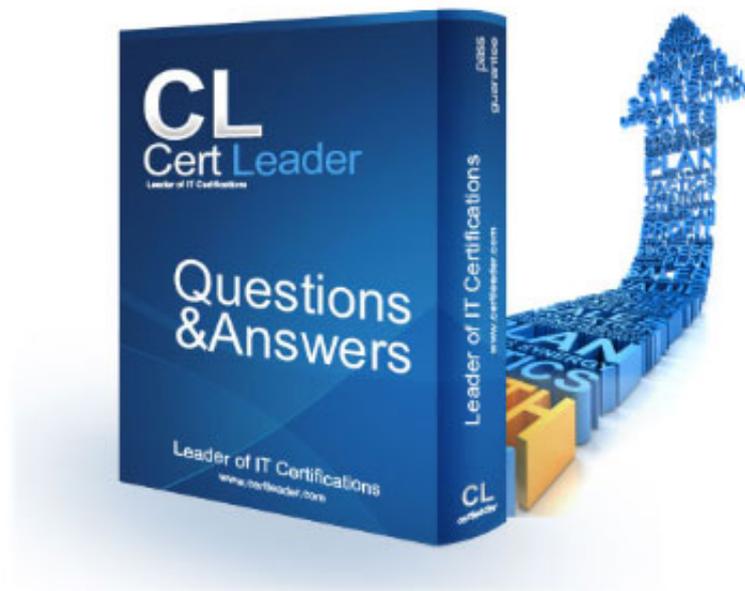

1. Which document is the least relevant as an output deliverable from the design phase?

- A. high-level design
- B. site requirements specification
- C. configurations
- D. migration plan

Answer: C

2. Which performance characteristic is least likely to require being addressed in the data center solution requirements?

- A. server virtualization
- B. desktop virtualization
- C. distributed computing
- D. private cloud
- E. power efficiency

Answer: E

3. Which item can be used as an alternative reconnaissance tool to the NetApp OnCommand Balance application?

- A. NetIQ PlateSpin
- B. VKernel vOPS
- C. Microsoft Assessment and Planning Toolkit
- D. VMware vCenter Orchestrator plug-in
- E. Symantec Enterprise Security Manager

Answer: A

4. Which design steps could be considered optional?

- A. audit

- B. solution sizing
- C. analysis
- D. deployment provision

Answer: A

5. Which technology differentiates a data center designed around Cisco equipment versus another vendor?

- A. NPV
- B. NPIV
- C. VSANs
- D. FCoE

Answer: C

6. Which two characteristics are associated with the core layer of a Cisco Data Center Unified Fabric network? (Choose two.)

- A. no packet manipulation
- B. QoS – policing
- C. voice, data, and wireless convergence
- D. scalable routing protocols
- E. provides default gateway redundancy
- F. QoS – classification and queuing

Answer: AD

7. The ANSI restriction that only 239 Fibre Channel domains are allowed per SAN fabric creates challenges for the designer working on a Cisco Data Center Unified Fabric network.

Which two approaches can the designer utilize to restrict the number of Fibre Channel domains below 239? (Choose two.)

- A. Daisy chain up to 100 core Fibre Channel switches, leaving 139 domains for the network edge.
- B. Assign a domain ID for each blade switch and top-of-rack access layer switch.

- C. Use NPV to cause a fabric or blade switch to appear as a host to the core Fibre Channel switch.
- D. Migrate to FCoE to eliminate the need for Fibre Channel domains.
- E. Utilize VSANs to allow scaling well beyond 239 domain IDs.

Answer: CE

8. Which three characteristics are associated with the aggregation layer of a Cisco Data Center Unified Fabric network? (Choose three.)

- A. no packet manipulation
- B. QoS – policing
- C. voice, data, and wireless convergence
- D. scalable routing protocols
- E. provides default gateway redundancy
- F. QoS – classification and queuing
- G. routing manipulation and filtering
- H. aggregates end users

Answer: BEG

9. Which three characteristics are associated with the access layer of a Cisco Data Center Unified Fabric network? (Choose three.)

- A. no packet manipulation
- B. QoS – policing
- C. voice, data, and wireless convergence
- D. scalable routing protocols
- E. provides default gateway redundancy
- F. QoS – classification and queuing
- G. routing manipulation and filtering
- H. aggregates end users

Answer: CFH

10. Which protocol is best suited for connecting two data centers together?

- A. LISP
- B. OTV
- C. FabricPath
- D. vPC

Answer: B

11. Which statement about the Overlay Transport Virtualization protocol is true?

- A. It is IP-based functionality that provides Layer 3 extension over any transport.
- B. The data plane exchanges MAC reachability info.
- C. The control plane protocol is IS-IS.
- D. It supports FCoE.

Answer: C

12. What is one example of a fully virtualized environment in the data center?

- A. Hadoop clusters
- B. VDI
- C. vPC
- D. VSAN

Answer: B

13. Which option is an advantage of utilizing hypervisor technology within a Cisco Unified Fabric data center environment?

- A. distributed load processing
- B. availability of blade versus rack-mountable servers

- C. reduced power and cooling requirements
- D. integrating the virtual machines into the access layer

Answer: A

14. Which option is a recommended practice when migrating from an existing data center to a new data center?

- A. Assign multiple virtual servers per one high-performance server.
- B. Utilize the hypervisor tools available to ensure processor compatibility.
- C. Only migrate bare metal servers when transitioning from rack-mountable to blade servers.
- D. Utilize FabricPath across data centers to manage the migration.

Answer: B

15. When migrating to a Cisco Unified Fabric data center network, which transitions will you expect to see?

- A. rack-mountable to blade servers
- B. physical to virtual machines
- C. Fibre Channel to FCoE
- D. iSCSI to NAS

Answer: C

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 642-998 Exam with Our Prep Materials Via below:

<https://www.certleader.com/642-998-dumps.html>