


# JN0-343 - uniper Networks Certified Internet Specialist (JNCIS-ENT)

<http://www.certleader.com/JN0-343-dumps.html>

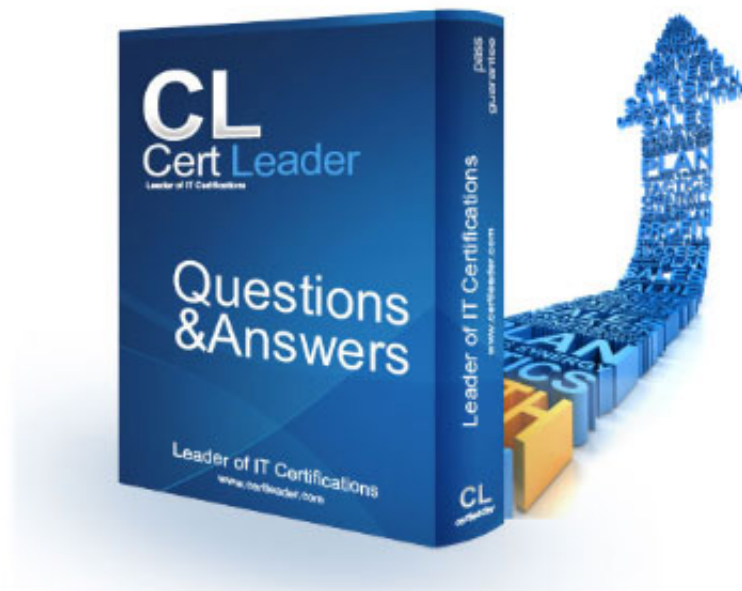

1. How much overhead does the GRE header add to an IPv4 packet?

- A. 24 bytes
- B. 32 bytes
- C. 48 bytes
- D. 64 bytes

**Answer: A**

2. Based on the exhibit, in which spanning-tree state would the indicated port be?

- A. listening
- B. learning
- C. forwarding
- D. blocking

**Answer: C**

3. Which OSPF area type can contain Type 7 LSAs?

- A. backbone
- B. not-so-stubby
- C. stub
- D. totally stubby

**Answer: B**

4. Which two pieces of information are communicated by IS-IS TLVs? (Choose two.)

- A. network protocols supported
- B. designated router priority
- C. authentication key
- D. PDU Length

**Answer: AC**

5. Which configuration disables a port when more than 30,000 Kbps of broadcast traffic is received over an aggregated Ethernet interface with two member links?

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer: C**

6. Given the following output, what has been configured for the 192.168.3.0/24 prefix?

- A. per-flow load balancing
- B. a floating static route
- C. per-packet load balancing
- D. a qualified next hop

**Answer: A**

7. Which two of the following are functions of the BGP update message? (Choose two.)

- A. It withdraws routes that are no longer valid.
- B. It notes that an unsupported option is detected from the open message.
- C. It transports routing information between BGP peers.
- D. It readvertises routes that have already been sent and acknowledged.

**Answer: AC**

8. Which routing-instance type allows the sharing of interface routes and the support features used in source-

based routing?

- A. virtual-router
- B. vrf
- C. forwarding
- D. multi-instance

**Answer: C**

9. What is the minimum configuration necessary to create two VLANs and two operational RVIs?

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer: B**

10. Which statement describes the default Junos OS behavior for OSPF?

- A. External LSAs are advertised in a stub area.
- B. An ABR does not announce a default route into a stub area.
- C. Stub area internal routers generate a default route.
- D. Only totally stubby areas need a default route.

**Answer: B**

11. What are two valid BPDU types? (Choose two.)

- A. topology change notification
- B. configuration change
- C. configuration

D. root bridge

**Answer:** AC

12. Which of the following is enabled by default on an EX Series switch?

A. MAC move limiting

B. storm control

C. IP source guard

D. dynamic ARP inspection

**Answer:** B

13. Which three statements correctly describe the default BGP advertisement behavior in the Junos OS? (Choose three.)

A. Routes learned through EBGP are advertised to IBGP peers.

B. Routes learned through EBGP are advertised to other EBGP peers.

C. Routes learned through IBGP are advertised to other IBGP peers.

D. Routes learned through IBGP will be advertised to EBGP peers.

E. Routes learned through an IGP are automatically advertised to EBGP peers.

**Answer:** ABD

14. When loop protection is enabled on an interface, what happens when the port stops receiving BPDUs?

A. The port is placed in a loop-inconsistent role.

B. The port is placed into listening mode.

C. The port is transitioned into a forwarding state.

D. The interface is disabled.

**Answer:** A

15. Which OSPF LSA type is sent by all routers in an area to advertise its connected subnets?

- A. router
- B. network
- C. external
- D. summary

**Answer: A**

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your JN0-343 Exam with Our Prep Materials Via below:**

<http://www.certleader.com/JN0-343-dumps.html>