


## **303-200 - LPIC-3 Exam 303: Security, version 2.0**

<http://www.certleader.com/303-200-dumps.html>

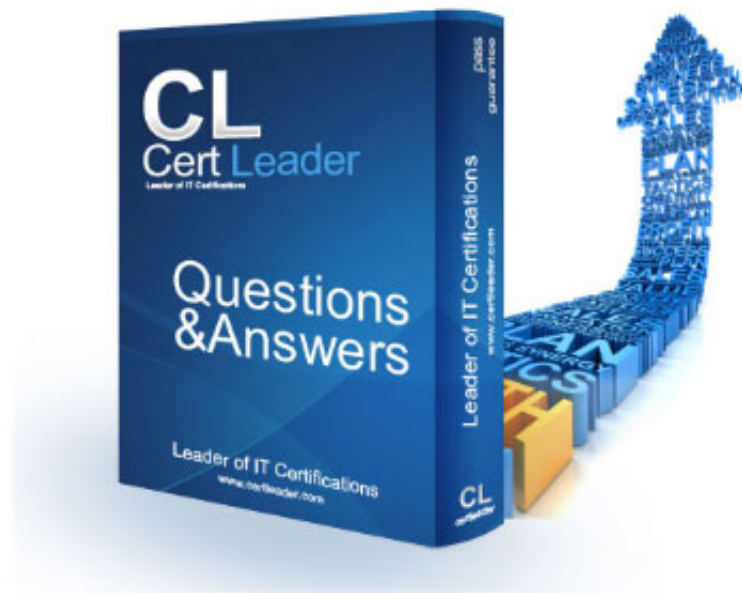

1. Which command revokes ACL-based write access for groups and named users on the file afile?

- A. `setfacl -x group: * : rx, user:*: rx afile`
- B. `setfacl -x mask: : rx afile`
- C. `setfacl ~m mask: : rx afile`
- D. `setfacl ~m group: * : rx, user:*: rx afile`

**Answer: C**

2. Which of the following authentication methods was added to NFS in version 4?

- A. Kerberos authentication
- B. SSH hostkey authentication
- C. Winbind authentication
- D. SSL certificate authentication

**Answer: A**

3. Which of the following access control models is established by using SELinux?

- A. Security Access Control (SAC)
- B. Group Access Control (GAC)
- C. User Access Control (UAC)
- D. Discretionary Access Control (DAC)
- E. Mandatory Access Control (MAC)

**Answer: E**

4. Which command is used to run a new shell for a user changing the SELinux context? (Specify ONLY the command without any path or parameters.)

**Answer:**

`newrole`

Explanation: <https://www.centos.org/docs/5/html/DeploymentenLGuide-en-US/sec-sel-admincontrol.html>

5. What option of `mount.cifs` specifies the user that appears as the local owner of the files of a mounted CIFS

share when the server does not provide ownership information? (Specify ONLY the option name without any values or parameters.)

**Answer:**

uld=arg

Explanation: <http://linux.die.net/man/8/mount.cifs>

6. What happens when the command `getfattr afile` is run while the file `afile` has no extended attributes set?

- A. `getfattr` prints a warning and exits with a values of 0.
- B. `getfattr` prints a warning and exits with a value of 1.
- C. No output is produced and `getfattr` exits with a value of 0.
- D. No outputs is produced and `getfattr` exits with a value of 1

**Answer: C**

7. How are SELinux permissions related to standard Linux permissions? (Choose TWO correct answers.)

- A. SELinux permissions overnde standard Linux permissions.
- B. standard Linux permissions override SELinux permissions.
- C. SELinux permissions are verified before standard Linux permissions.
- D. SELinux permissions are verified after standard Linux permissions.

**Answer: B, D**

8. Which of the following prefixes could be present in the output of `getcifsacl`? (Choose THREE correct answers.)

- A. ACL
- B. GRANT
- C. GROUP
- D. OWNER
- E. SID

**Answer: A, C, E**

9. Which of the following are differences between AppArmor and SELinux? (Choose TWO correct answers).

- A. AppArmor is implemented in user space only. SELinux is a Linux Kernel Module.
- B. AppArmor is less complex and easier to configure than SELinux.
- C. AppArmor neither requires nor allows any specific configuration. SELinux must always be manually configured.
- D. SELinux stores information in extended file attributes. AppArmor does not maintain file specific information and states.
- E. The SELinux configuration is loaded at boot time and cannot be changed later on AppArmor provides user space tools to change its behavior.

**Answer:** B, D

10. Linux Extended File Attributes are organized in namespaces. Which of the following names correspond to existing attribute namespaces? (Choose THREE correct answers.)

- A. default
- B. system
- C. owner
- D. trusted
- E. user

**Answer:** B, D, E

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your 303-200 Exam with Our Prep Materials Via below:**

<http://www.certleader.com/303-200-dumps.html>